
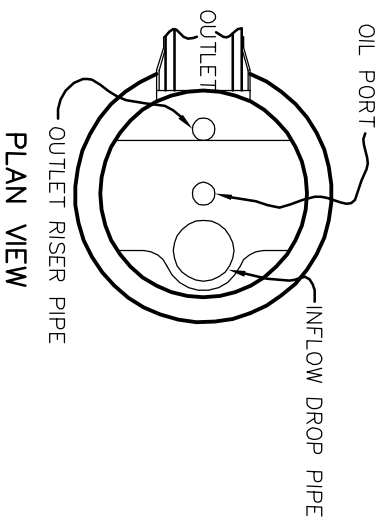


**STANDARD SPECIFICATIONS
(MANUFACTURE)**

- ASTM C-478
- AASHTO M-199

**JOINT SPECIFICATIONS
(RUBBER GASKET)**

- ASTM C-443
- AASHTO M-315

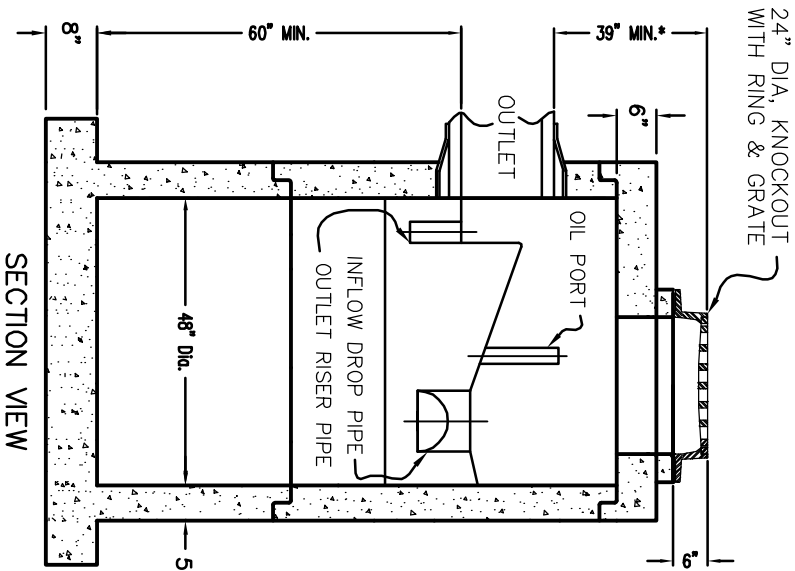

- PROTECTED BY ONE OR MORE OF THE FOLLOWING U.S. PATENTS: 4,985,148 & 5,498,331 & 5,725,760 & 5,849,181 & 5,753,115 & 6,068,765
- STORMCEPTOR IS CONFINED SPACE ENTRY, SUPPLIED WITH STEPS ONLY BY REQUEST
- CONNECTIONS SHOWN WITH FLEXIBLE CONNECTOR FPR SMOOTH EXTERIOR PIPE ONLY. BOOTS NOT AVAILABLE FOR ALL SIZES AND TYPES. PIPE MAY BE GROUTED BY PURCHASER
- RING & GRATE TO BE D&L SUPPLY A-1043
- DESIGNED FOR HS20 LOADING
- FOR LESS THAN MINIMUM, CONTACT MANUFACTURER. ADDITIONAL ACCESS IS SUGGESTED
- SCALE: NONE



725 BRYAN STOCK TRAIL
CASPER, WYOMING 8260
Phone: (307)265-3100
Fax: (307)265-0013

DRAWN BY: MDB

DATE: 2-23-09

**INLET STORMCEPTOR
(MODEL 450)**